

FALLPROTEC

Height Safety Products

FALLPROTEC RIGID RAIL FOR HEIGHT SAFETY





Tarragona, Spain

RIGID RAIL FOR HEIGHT SAFETY

EN795:2012 Type D

ANSI/ASSP Z359.6

The SafeAccess is an undeformable fall arrest rail for industrial applications. Installed in overhead configuration, it is the most suitable system when the fall clearance is low. ATEX certified for potentially explosive atmospheres, this rail is also ideal for petrochemical industries and highly corrosive environments. The aluminium rail is protected by a high-quality powder coated surface treatment that resists to marine environment.

An ultra-resisting height safety rail


The SafeAccess is tested and certified according to European and ANSI standards.

- Undeformable in case of a fall
- ATEX certified for explosive atmospheres
- Up to 4 users simultaneously
- Low maintenance
- Follows the end user instantly
- Bendable on demand (min. radius = 600mm)
- Fixed to steel structure or concrete


Applications:



Industrial



Loading bays

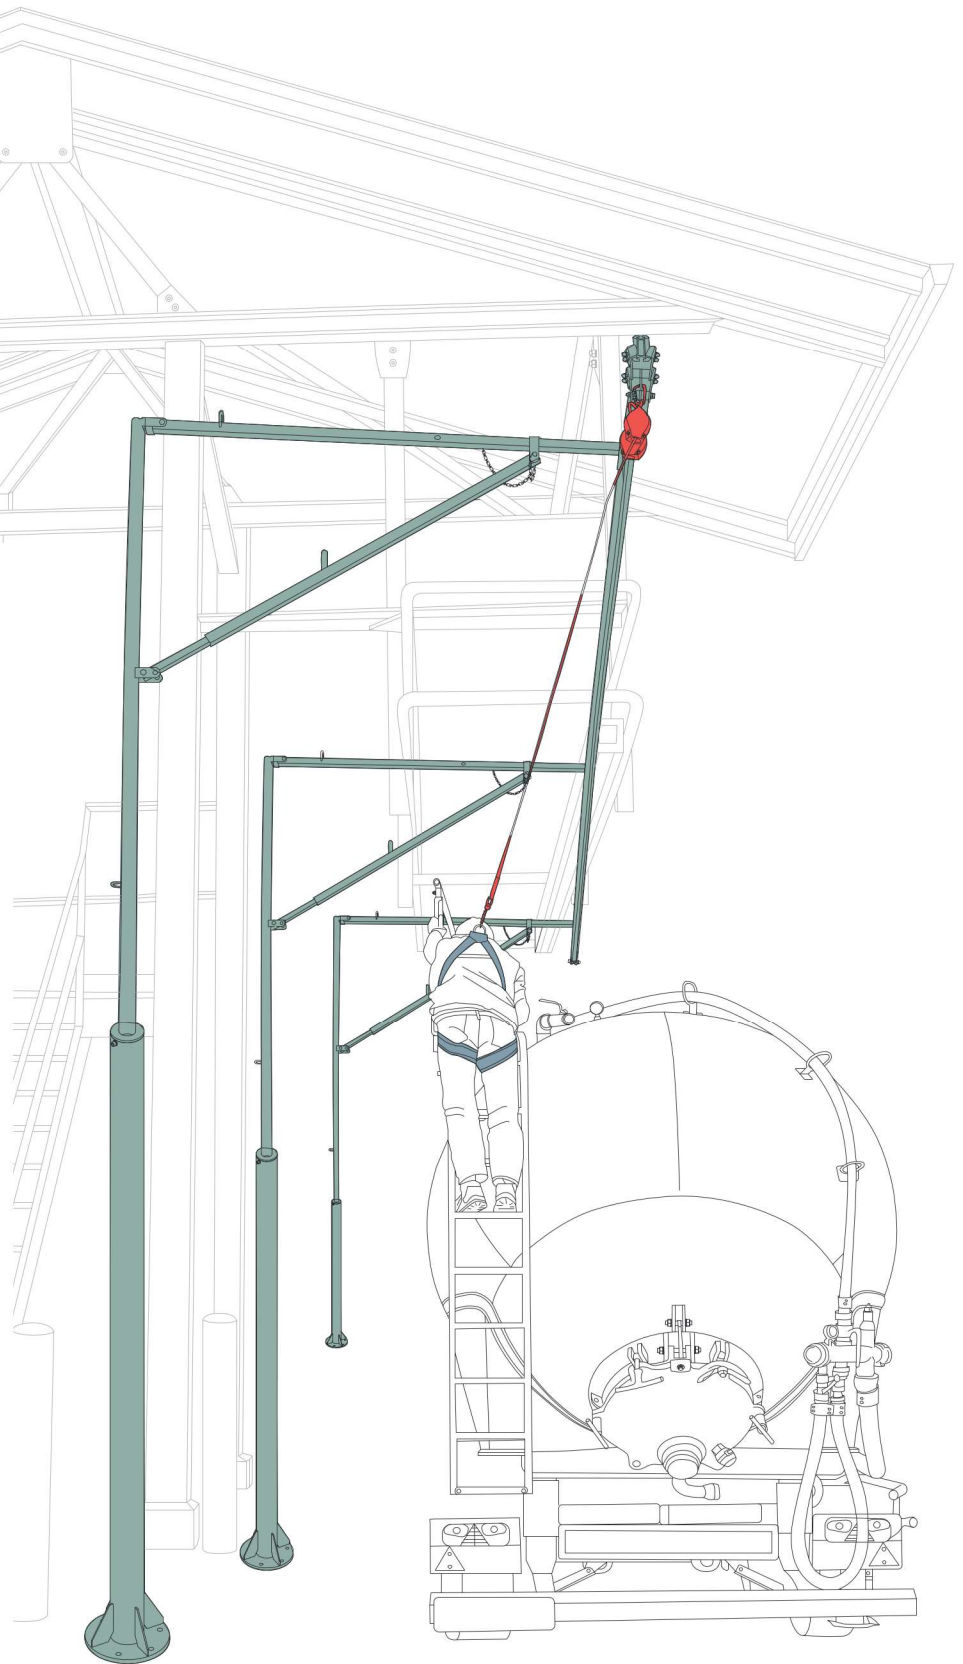

SafeAccess rail for fallarrest

The SafeAccess can be used for fall arrest in many combinations: ground, wall, ceiling or jibs above a loading bay. The robust design suits intensive applications, the rail remains usable years after being installed. In case of a fall, it is one of the very few systems where there will be no need to replace any part. Combined with a safety block enables the safest possible fall arrest.


EN795:2012 Type D | CEN/TS16415:2013



X 4
(2 users with Flexbow)



Click here to follow the product YouTube playlist

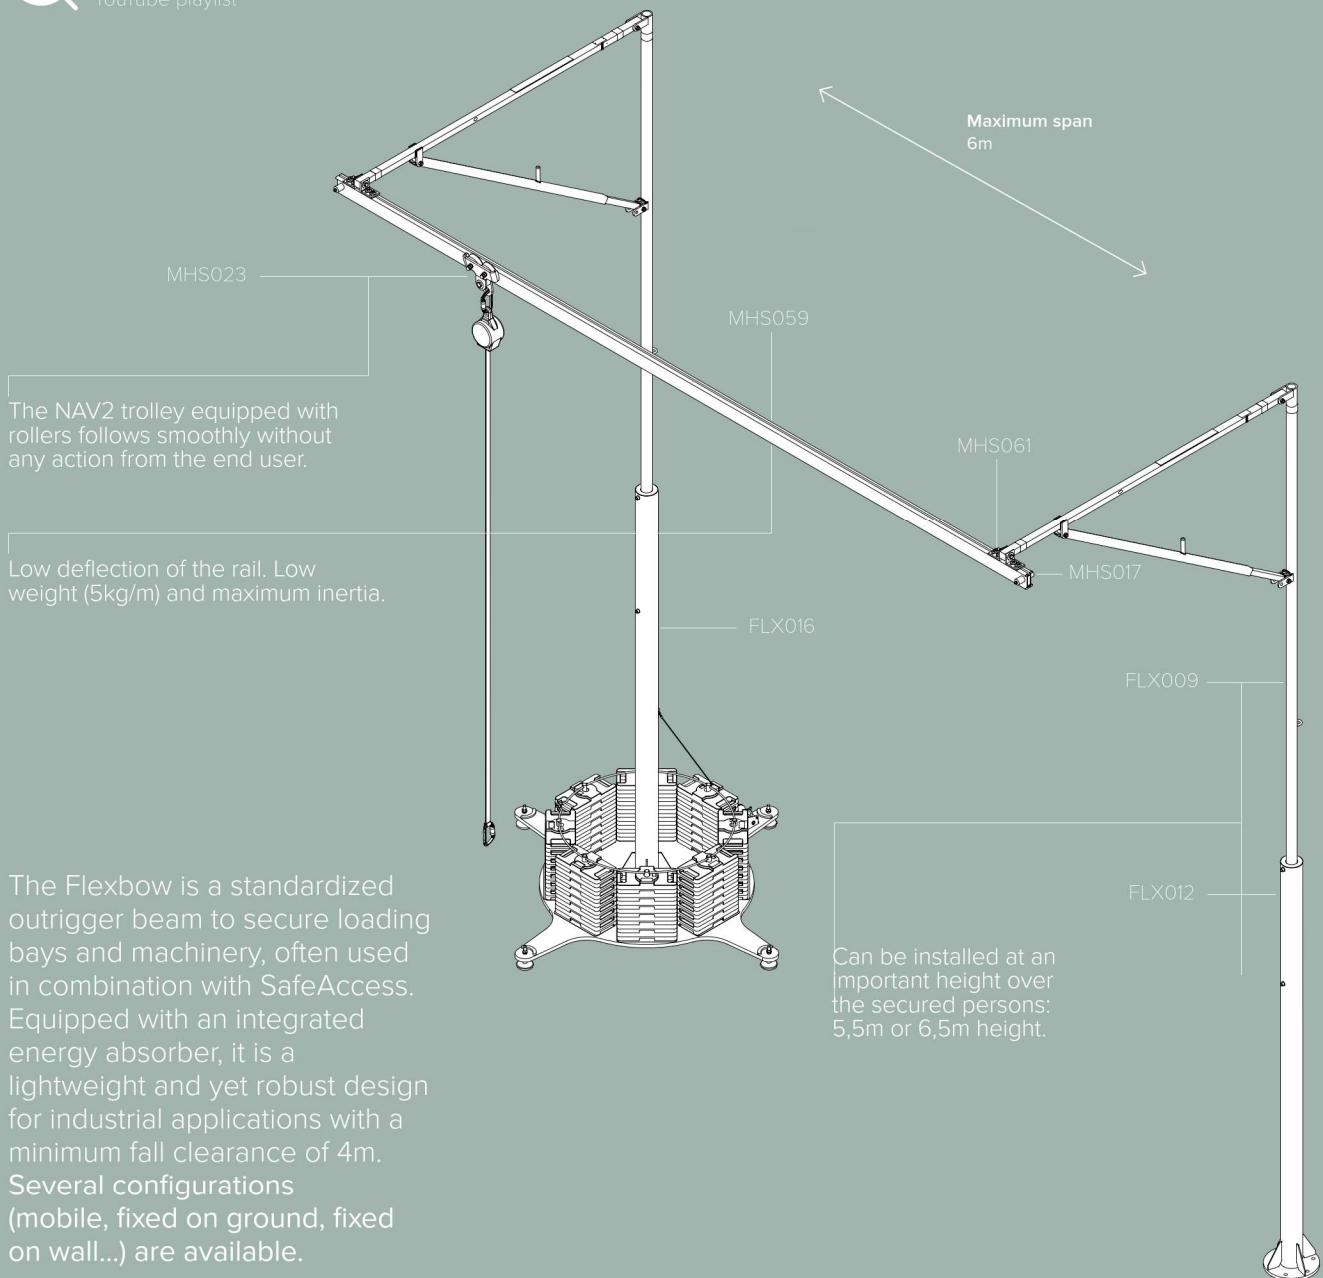

Fixing brackets

Fixing the rigid rail on existing industrial sites is facilitated thanks to the standardized fixing brackets of Fallprotec. The rail is generally mounted to the ceiling with either:

- Plate MHS038 for concrete
- Universal fixing plates for clamping on beams between 50 and 300mm width.
- Adjustable hanger brackets.
- Rigid welded steel hanger brackets


Ceiling bracket

It comes with MHS062 bolts

MHS038



Fixing bracket by clamping

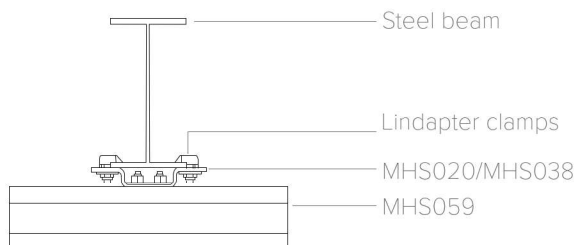

The adjustable brackets enable to:

- Adapt to the size of the beam (50 – 300mm)
- Compensate the slope of the roof
- Tube length can be cut on site to adapt to final measurements.
- Quick delivery with standard components



Trolleys

NAV2 for fall arrest

Trolley in stainless steel with POM wheels. Follows instantly the end user when he walks, even if the rail is installed 20 meters above the walking surface. Typically combined with a self-retractable lanyard.

MHS023



Fallprotec's SafeAccess lifelines worldwide

Click here to view more
case studies worldwide
on our website





CHOOSING FALLPROTEC MEANS

- One reference for global assistance
- Certified by notifying bodies as per latest European standard
- Quality control: ISO9001:2015.
E.C. Quality of Production « Article 11B »
- Product liability insurance
- Warranty
- One-Stop-Shop




📍 Truck loading station
France

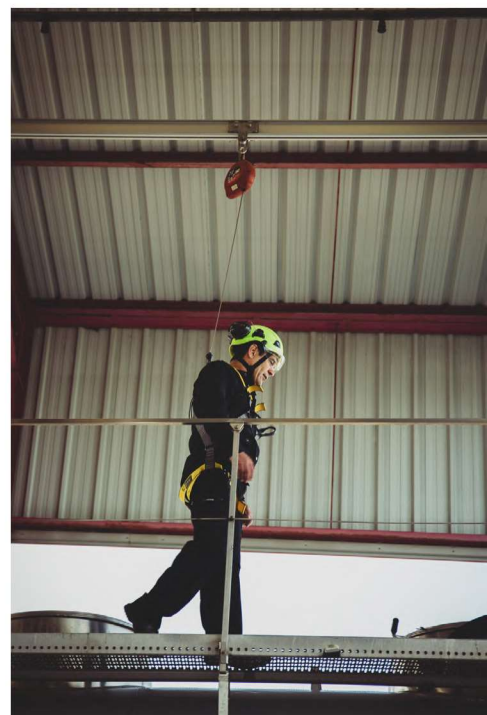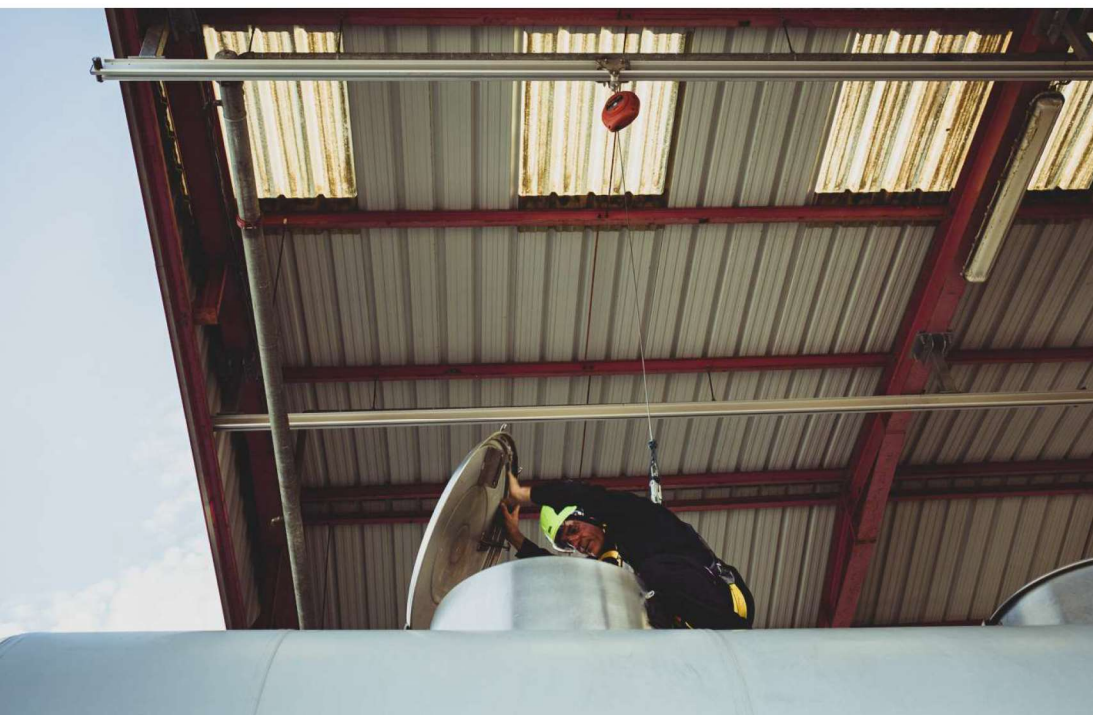

📍 Oil&Gas loading station
Tarragona, Spain





📍 SNCB
Mechelen, Belgium

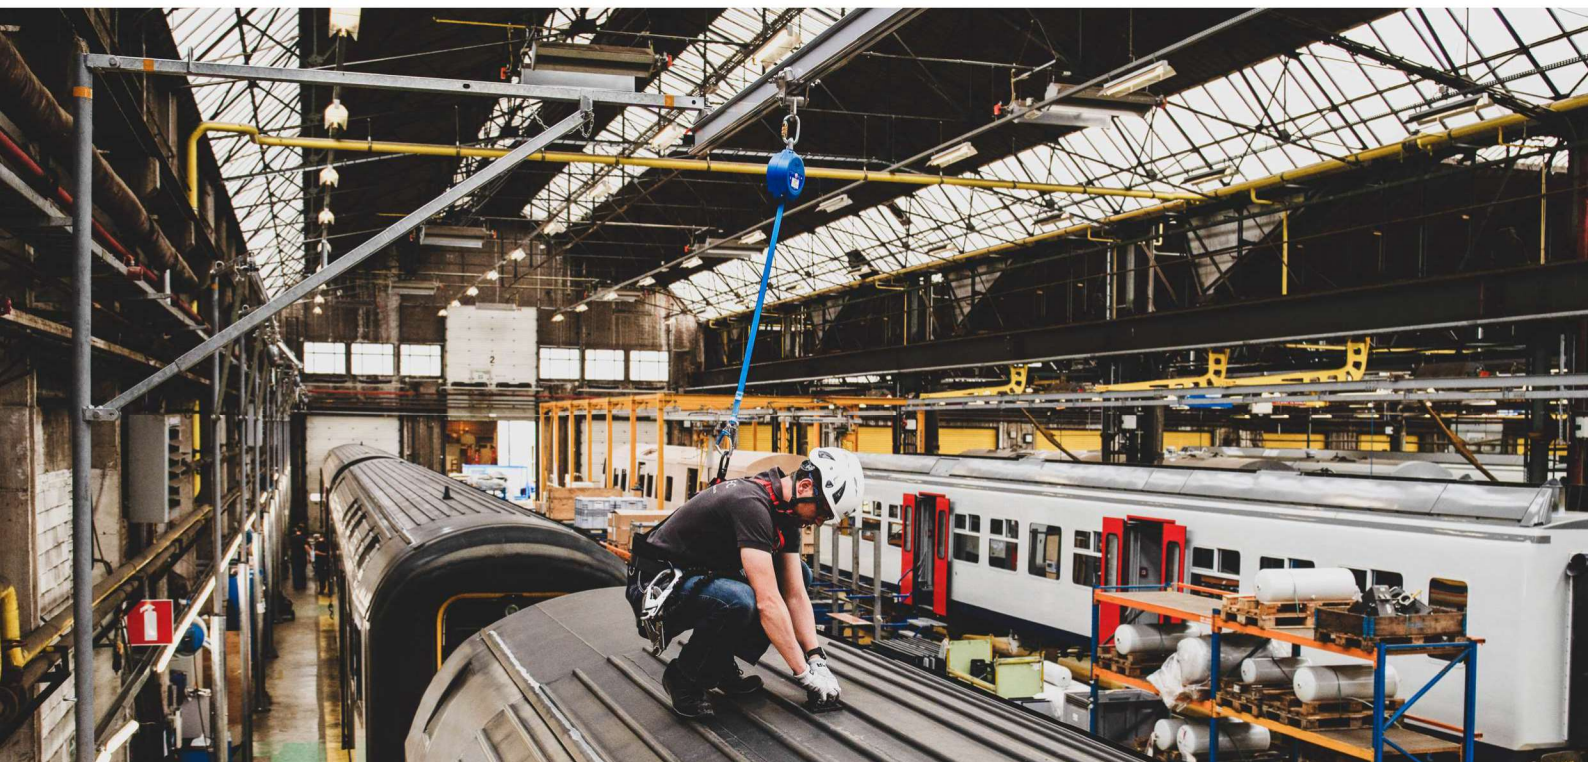



📍 Airbus
Toulous, France



📍 Query
Arganda del Rey, Spain

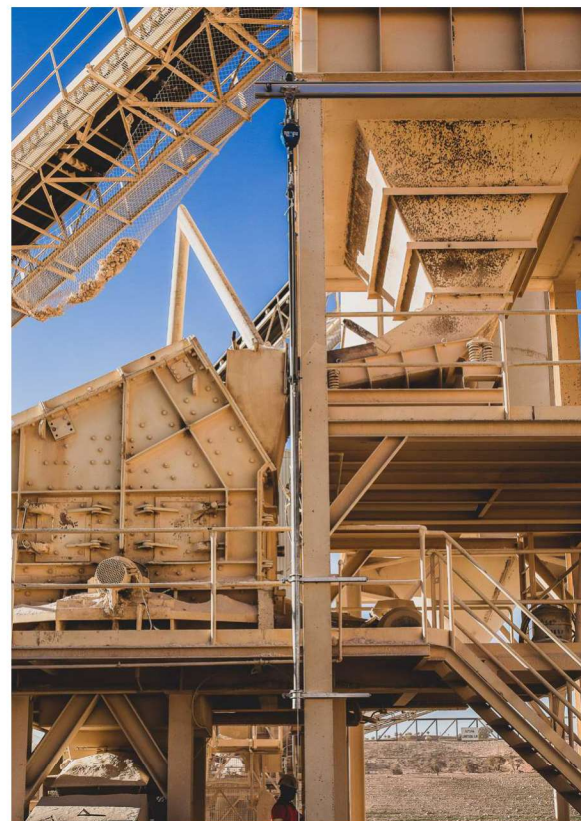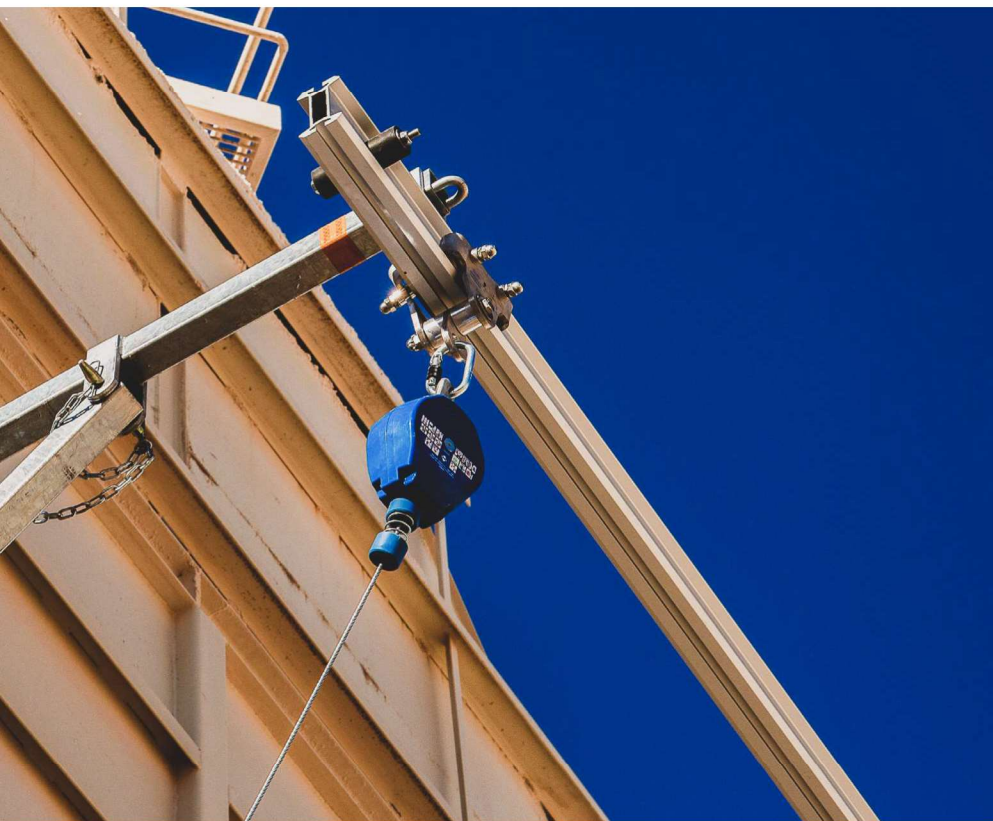

📍 Formwork industry
Montcada i Reixac, Spain

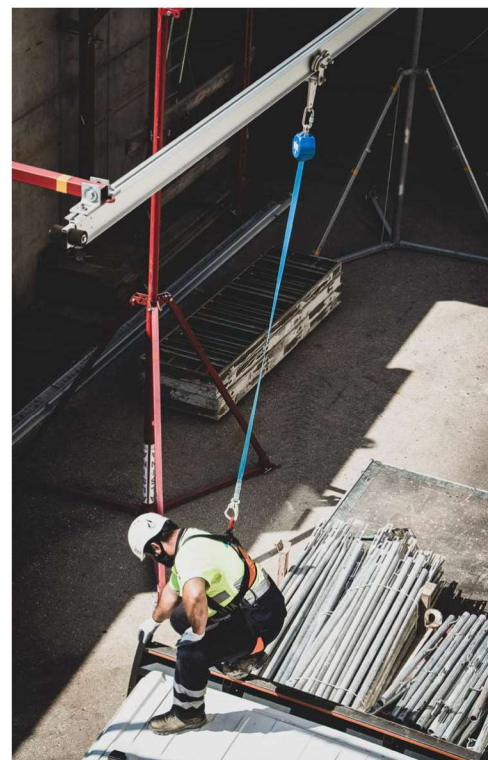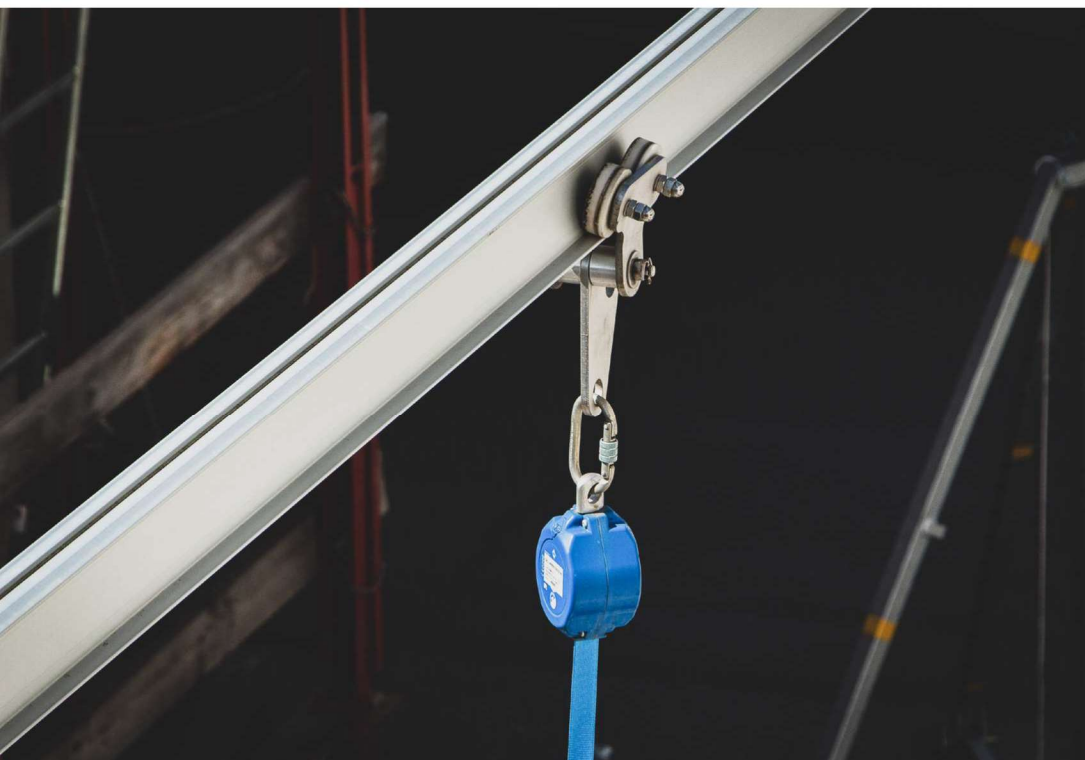

📍 BlueSun
Mataró, Spain

